

# IW-R400 (4U 20")


Economical Industrial 4U Server Chassis



Pedestal & Rackmount

## Features & Benefits

- Superior cooling solution with front air intake
- Lockable front door for data security
- Decreased vibration
- Single or redundant power supply options
- Tool-free design for easy installation & lower maintenance cost

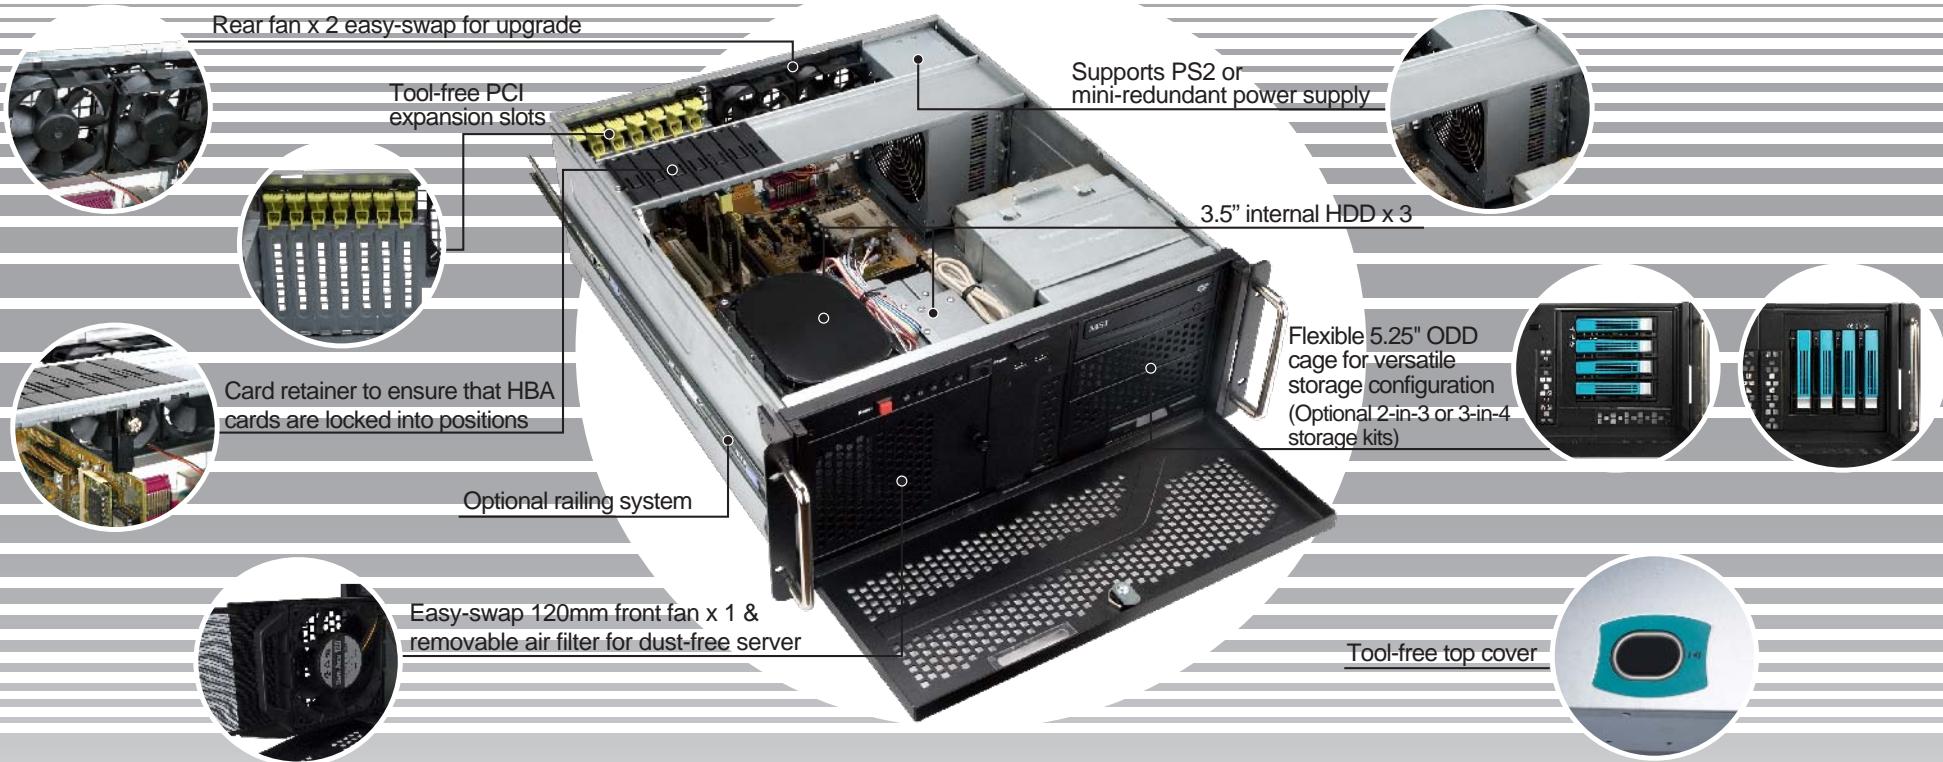

# IW-R400 (4U 20")

Economical Industrial 4U Server Chassis


Front View



Rear View



Inside View

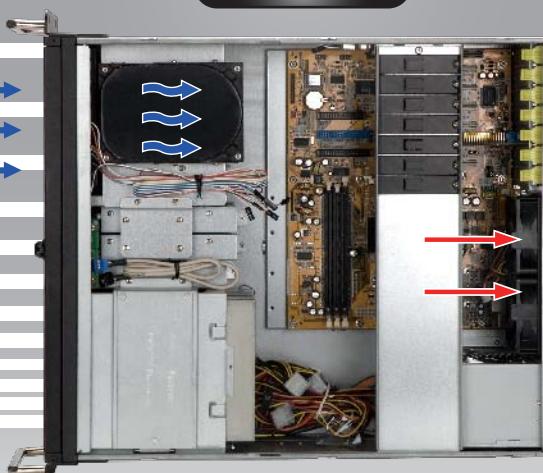

## Specifications

Standard	EIA-RS310D
M/B Form Factor	ATX (12" x 9.6"), CEB (12" x 10.5")
Dimensions (DxWxH) w/ Front Panel	508 x 482.6 x 177.8mm (20" x 19" x 7")
Drive Bay	External: 5.25" x 3, 3.5" x 2 Internal: 3.5" x 3
Power Supply	Form Factor: PS2, Mini-Redundant Watts: PS2 up to 750W, Mini-Redundant up to 650W
Indicator	Power Status, HDD, LAN1, LAN2, System Fail Activity LEDs
Front Control Panel	Power Switch, System Reset, USB 2.0 x 2
Chassis Security	Intrusion Switch
Cooling Fan	120 x 25mm PWM Front Fan x 1 80 x 25mm PWM Rear Fan (Easy-Swap) x 2 (Optional)
Expansion Slot	7
Material	Material : SGCC Thickness: 1.2mm
Packaging Dimensions (DxWxH)	720 x 640 x 340mm
Shipping Information	Net Weight: 12.3 kg Gross Weight: 17.8 kg Cubic Feet: 5.53 Container Info(Single Packing): 20': 189pcs, 40': 378pcs, 40'H: 420pcs

\* Above image for reference only. All hardware components are not included.

\* The actual product is subject to change without prior notice. In Win Development Inc. reserves the right to make final modifications.

